



SUPPORTI

PER RULLAMENTO

Supporti posapezzi: S1 per particolari tondi e cavi; S2 per particolari tondi sostenuti esternamente.

S1RM



S2RM



S1R




S2RE






		(mm)	A	B	C	D	E	F	G	H	I	L	M	N	X/Y	Ø
S1RM	MB41 - MB71	60	100	51	52	4	33	80	17	75	40	30	6,5	20+optional		
S2RM	MB41 - MB71	60	100	25	20,2	4	39,5	80	10	32	40	40	6,5			19
S1R	MB41 - MB71	89	175	74	75		48	139,5	26	109	62	52	8	20+optional		
S2RE	MB71	80	250	62	44	59	58	237	20				11			48


S1RM/S1R

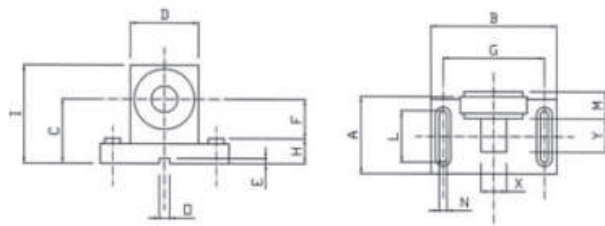

S2RM



S2RE

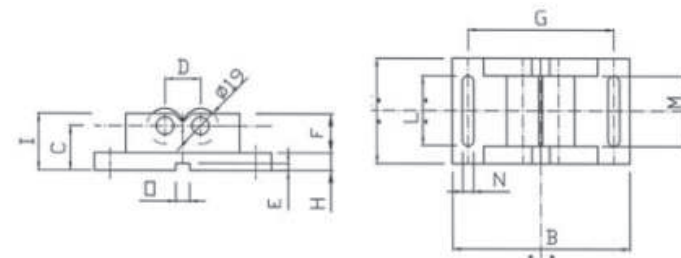




SUPPORTI

PER RULLAMENTO

Supporto SR100 per punzoni circolari o rulli portacaratteri conici

SR100

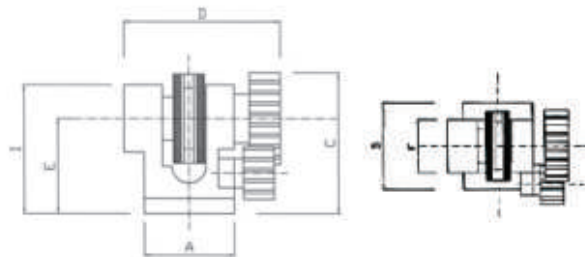

	(mm)	A	B	C	D	E	F	G	H	I	L	M	N	O	Ø
SR100	MB71	58	73	92	97	67	43			83					




SUPPORTI

PER TUTTE LE MACCHINE

Supporto S3R con 3 rulli o 2 rulli
e un punzone speciale centrale

S3R

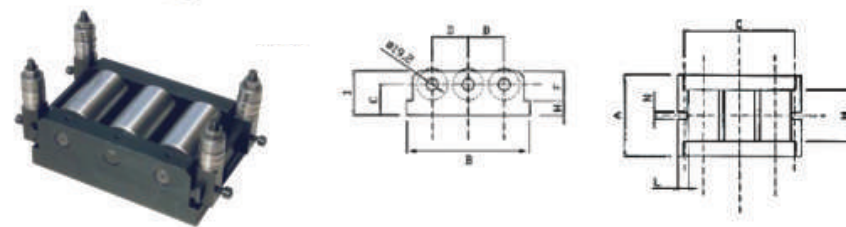

		(mm)													
		A	B	C	D	E	F	G	H	I	L	M	N	O	Ø
S3R	MB71CE	110	170	42	49		40	150	20	60	15	70	10	8	42